



INVESTOR IN PEOPLE

Rec'd PCT/PTO 21 APR 2005

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 17 NOV 2003

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR  
(b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

30 October 2003

BEST AVAILABLE COPY

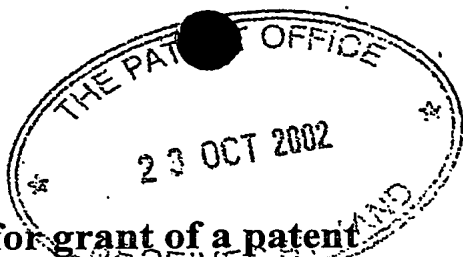

# The Patent Office

24OCT02 E758057-8 D01038  
P01/7700 0.00-0224671.8

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference P708083GB/AJC/48395

2. Patent application number  
(The Patent Office will fill in this part)

0224671.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Premier Diagnostics Limited  
3 Marley Way  
Banbury  
Oxfordshire  
OX16 2RL  
United Kingdom

Patents ADP number (if you know it)

8490385081

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Test Device for Internal Combustion Engine

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for each of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 7

Claim(s) -

Abstract -

Drawing(s) 2 + 2 *ll*

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature: *W. Messerschloek* Date 22/10/2002

12. Name and daytime telephone number of person to contact in the United Kingdom Adrian J Chettle 01926 336111

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

P708083GB

# **Test Device for Internal Combustion Engine**

This invention relates to a test device for an internal combustion engine, and particularly though not exclusively to a device for analysing exhaust gas.

5

Environmental considerations require that exhaust emissions of internal combustion engines are maintained within predetermined limits. In many cases such limits are the subject of specific legislation.

10 In the case of motor vehicles, exhaust emission levels are checked at the periodic test of fitness for use. In the UK such a test is performed annually for each year after the third from initial vehicle registration. Such a test is necessary in order to ensure that a deterioration in exhaust emissions is corrected at the earliest opportunity.

15 Different tests may be specified according to national legislative requirements, and according to the type of internal combustion engine. In particular, the exhaust emissions of gasoline and diesel engine have different characteristics. In the case of diesel engines particulate emissions are of particular concern since in high concentrations they may be carcinogenic. One method of detecting high exhaust  
20 emissions is to measure the opacity of a gas sample, such as in the smoke test of a diesel engine.

A typical fitness for use test is carried out within a closed building and comprises detailed examination of the vehicle structure. Emissions testing requires the vehicle  
25 engine to be running, and the specified test procedure may require the engine to run for several minutes, and be subjected to successive accelerations. It will be understood that these procedures inevitably produce exhaust emissions, which may be heavily fuel laden in the case of no load accelerations.

30 It would be desirable for the emissions part of the vehicle test to be performed out of doors, or with the vehicle exhaust connected to an extractor system. This is often

considered impractical because in the first case space requirements may be limited, and in cold weather it is undesirable to continually open and close the workshop doors: In the second case an extractor may influence engine performance by reducing or increasing back pressure on the exhaust.

5

Furthermore many test procedures require the tester to follow a predetermined test routine displayed on a control device, for example a dedicated processor with display, or a personal computer. For obvious reasons it is not convenient to continually move such equipment from inside a building to outside, and back.

10

A further significant problem is that of communicating signal readings from exhaust gas sensor to a base station having the necessary controls and print function. The gas sensor is typically hard wired to the base station, and the usual flexible lead is both vulnerable to damage and likely to present a tripping danger for personnel. Plainly the provision of a longer lead for outside testing increases both of these risks substantially. As mentioned above this solution is somewhat impractical if test procedures are displayed inside the building.

15

What is required is an improved test device which can overcome the aforementioned problems.

20

According to one aspect of the invention there is provided a device for testing the exhaust emissions of an internal combustion engine and comprising a base station, an exhaust gas sensor, and a hand portable display device having data input means, wherein said base station, sensor and display device further include wireless real-time data transfer means whereby data can be transmitted and received therebetween.

25

According to a second aspect of the invention there is provided a device for testing the exhaust emissions of an internal combustion engine and comprising a base station, an exhaust gas sensor, and a hand portable display device having data input means, wherein said base station, sensor and display device further include radio communication means whereby data can be transmitted and received therebetween.

30

By the term 'exhaust gas' we mean any exhaust emission of a vehicle including, but not limited to, smoke laden emissions of a diesel engine.

- 5 The arrangement of the invention allows vehicle emissions testing to take place outside, and at any location within range of the base station. Hard wiring of the gas sensor is avoided. The test operator may sit in the vehicle driving seat and follow instructions on the hand portable display device, and accordingly may keep the vehicle window closed - in this way the operator is not exposed to exhaust gases, particularly diesel emissions.
- 10 Furthermore the operator does not need to keep the display of the control device in sight:

In a preferred embodiment the real-time data transfer is by radio communication means.

- 15 In a typical test procedure, the operator will initialize the equipment by for example entering the make and model of vehicle, and any other necessary control parameters. The vehicle will be placed outside, and the exhaust gas sensor positioned at the exhaust outlet. The operator will take the display device to the vehicle, and sit inside with doors and windows closed. The vehicle engine will be started, and brought to optimum test
- 20 conditions, for example by ensuring engine temperature is at the normal operating level.

The operator will start the test routine by entering data into the display device, and will then follow a routine displayed on this device. Such a routine will typically prescribe certain acceleration cycles, and periods of running at a prescribed engine rpm.

25

During or following the test information will pass from the display device and the gas sensor to the base station, and control information may be emitted from the base station. The conclusion of the test will be signalled from the display, and the results typically printed out at the base station.

30

In the preferred embodiment, the gas sensor includes an integral gas analyser, and accordingly a test result is transmitted to the base station rather than test data. Such an

arrangement may reduce the risk of data corruption, and furthermore reduce radio traffic substantially. The base station may include a memory and printer. Data transfer is preferably in real-time so as, for example, to ensure that the test results are available in printed form when the operator returns to the base station.

5

A docking port may be provided on the base station of the gas sensor. Such a port permits instant recharging of sensor batteries whilst permitting periodic self checking and calibration routines. The docking port may further include heating means whereby the sensor is maintained at a suitable operating temperature. The docking port may also permit data transfer between the base station and the gas sensor.

10

The base station may also include a docking port for the display device so as to permit opportunistic recharging of an internal battery. Such a docking port preferably orientates the display device for convenient use on the base station so that, if necessary, the test operator can enter initialization data via the display device. Alternatively the base station may include a separate keypad/keyboard. This docking port may also permit data transfer.

15

The docking ports may have physical connections to the respective component, or may be contactless.

20

In a preferred embodiment the device further includes an engine oil temperature probe having radio communication means for communicating with the display device. Such a probe provides information to the test operator concerning engine temperature, and is useful in determining when the test is to be started. It will be understood that an engine temperature signal may be used to prevent the emissions test being performed until a predetermined minimum temperature has been reached.

25

In another preferred embodiment the base station may include a smart card access device for enabling the test routine. Such an arrangement ensures that use of the device can be restricted to suitably qualified and authorized personnel. The smart card access

30

device is preferably linked to other components by wireless communication in real time.

Optionally the device further includes an engine speed sensor having radio communication means for communicating with the display device. Such a speed sensor provides information to the test operator concerning engine speed, and permits the operator to follow a test routine with precision.

Other features of the invention will be apparent from the following description of a preferred embodiment shown by way of example only in the accompanying drawings in which:-

- Figure 1 is a diagrammatic representation of a device for testing exhaust emissions according to the present invention.
- 15 - Figure 2 is a diagrammatic representation of a device for testing exhaust emissions with some of the component parts detached from the device.

Referring firstly to Figure 1 there is shown a device for testing exhaust emissions according to the present invention, generally designated 10. The device 10 comprises a trolley 12 having a base station 14, an exhaust gas analyser 16, a hand portable display device 18, an oil temperature sensor 19 and a smart card port 20 arranged thereon. The exhaust gas analyser 16, hand portable display device 18 and oil temperature sensor 19 are detachable from the trolley for use during operation of the device. The base station 14 has a printer and a full size keyboard (not shown) and the hand portable device 18 has a keypad (not shown) for data entry. The exhaust gas analyser 16 has an intake tube 22 for location in or on a vehicle exhaust pipe. The trolley 12 is further provided with wheels 24 to enable wheeling of the trolley to required locations.

The trolley has a power source (not shown) to provide the required power to the base station 14, exhaust gas analyser 16, hand portable display device 18, oil temperature sensor 19 and smart card port 20. The power source is typically mains electricity supplied via cable. The exhaust gas analyser 16, hand portable display device 18 and



oil temperature sensor 19 have power packs (not shown) to provide the necessary power when they are remote from the trolley 12. The power packs are charged by charging means when the exhaust gas analyser 16, hand portable display device 18 and oil temperature sensor 19 are on the trolley 12. The charging means have suitable connectors, but alternatively may be of the inductive kind having no metallic contacts between the trolley 12 and the detachable trolley components.

The exhaust gas analyser 16 may further be provided with a heater (not shown) to inhibit the formation of condensation therewithin. This is a useful feature since the repeated cycle of transporting the device 10 from a warm environment to a cold environment may cause the formation of condensation which may be detrimental to operation of the gas analyser.

Referring now to Figure 2 there is shown a diagrammatic representation of a device for testing exhaust emissions with some of the component parts detached from the device. Features similar to the device 10 of Figure 1 have like reference numerals. The base station 14, exhaust gas analyser 16, hand portable display device 18 and oil temperature sensor 19 are provided with radio transmitters and receivers (not shown) to allow the transmission of information and data therebetween indicated by the double headed arrows in Figure 2. In some embodiments some devices, such as the temperature sensor, may transmit only.

In use the trolley 12 is placed in a suitable location near to the usual test location, for example, adjacent an inside vehicle lift. The exhaust gas analyser 16, hand portable display device 18 and oil temperature sensor 19 are detached from the trolley 12 and taken to the vehicle at a somewhat remote location, typically outside. The intake tube 22 of the exhaust gas analyser 16 is located in the exhaust pipe of the vehicle and the oil temperature sensor 19 is located in place of an engine oil dip stick of the vehicle. The device 10 is initialised by an operator placing a smart card into the smart card port 20. This ensures that the device can only be used by operators possessing an authorised smart card. The smart card reader may communicate in real time by radio

transmitter/receiver, and the reader may further include a manual override, for example protected by password.

5 In use, the hand portable display device 18 is taken into the vehicle and the operator follows the instructions presented on the display device 18.

Radio communication between the base station 14, exhaust gas analyser 16, hand portable display device 18 and oil temperature sensor 19 permits information concerning the exhaust gases to be transmitted in real time. Alternatively memory cards  
10 in the communicating components of the device 10 permit the information to be stored and transmitted on demand. The hand portable device 18 is also provided with a spare port (not shown) of the type RS232 should it be necessary to operate the hand portable device 18 with a conventional wire connection.

15 Optionally the device 10 has an engine speed sensor (not shown) which can be located on the engine of the vehicle whose exhaust emissions are to be tested. The engine speed sensor is also provided with radio communication means to allow further test data to be captured and processed if necessary. In particular the engine speed sensor may help to provide further information relating to the exhaust gas at different engine speeds.

20 Whilst a preferred embodiment for the device has been described it will be appreciated that many other designs of the trolley exist that would have the desired effect of the invention with the proviso that the device transmits information relating to exhaust gases either in real time or saves the information for transmission in wireless form at a  
25 later time. Delayed transmission may be desired in order to allow radio traffic to be prioritised.

Although the invention has been described in relation to trolley mounted equipment, it will be readily understood that the base station could be bench mounted, or part of a  
30 dedicated fixed installation.

1/2

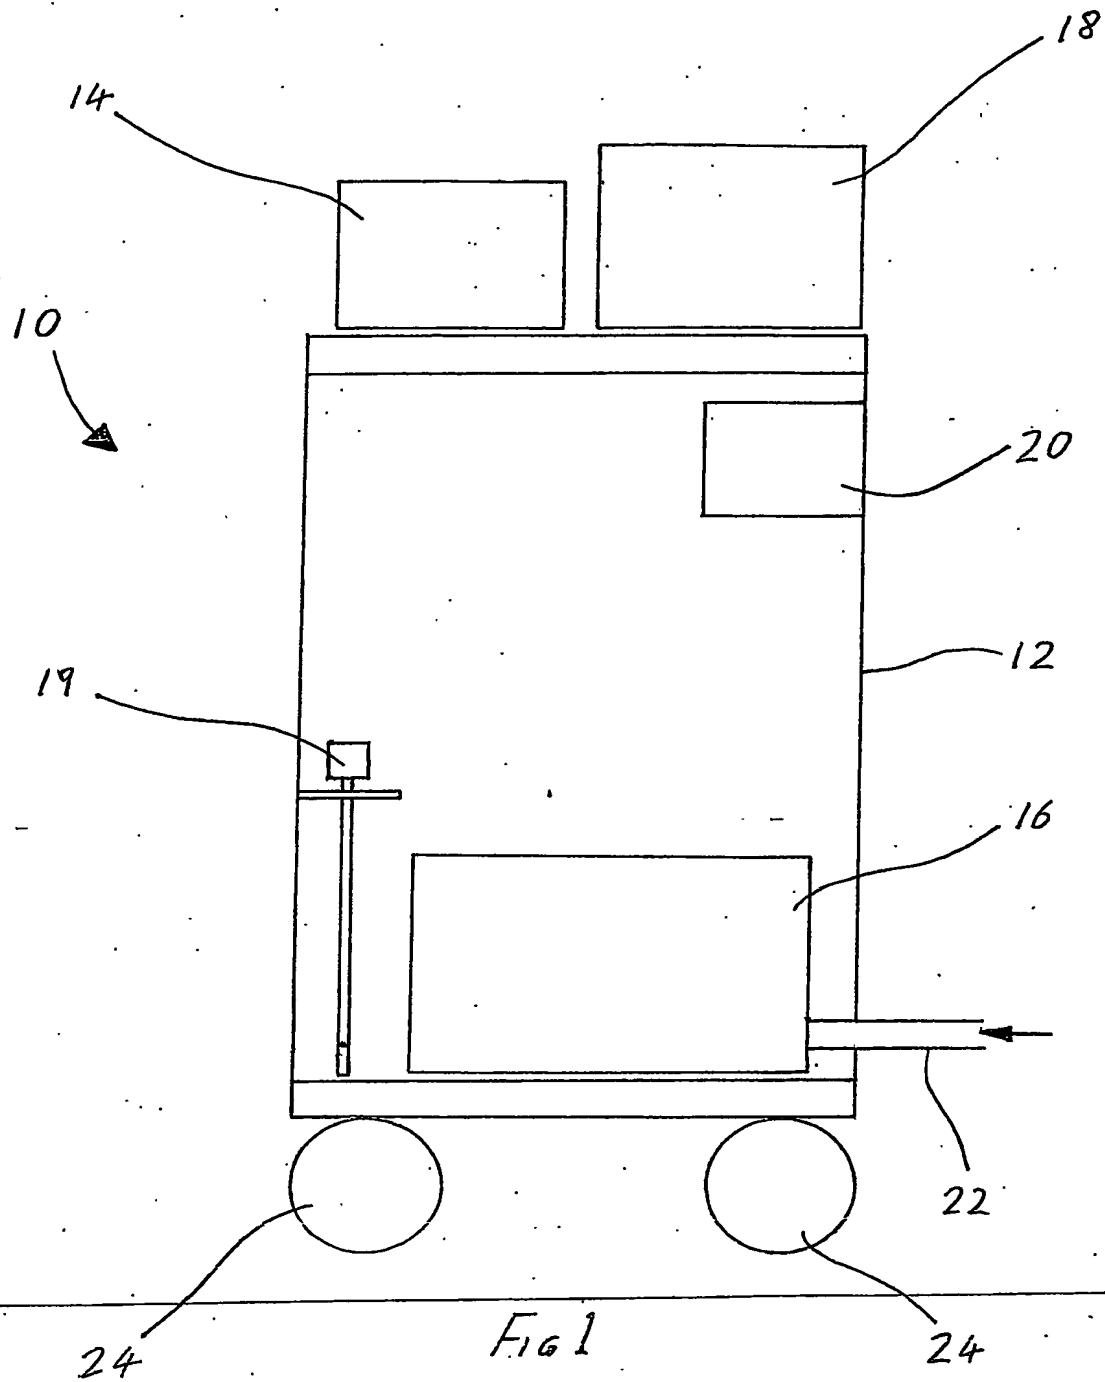


Fig 1

2/2

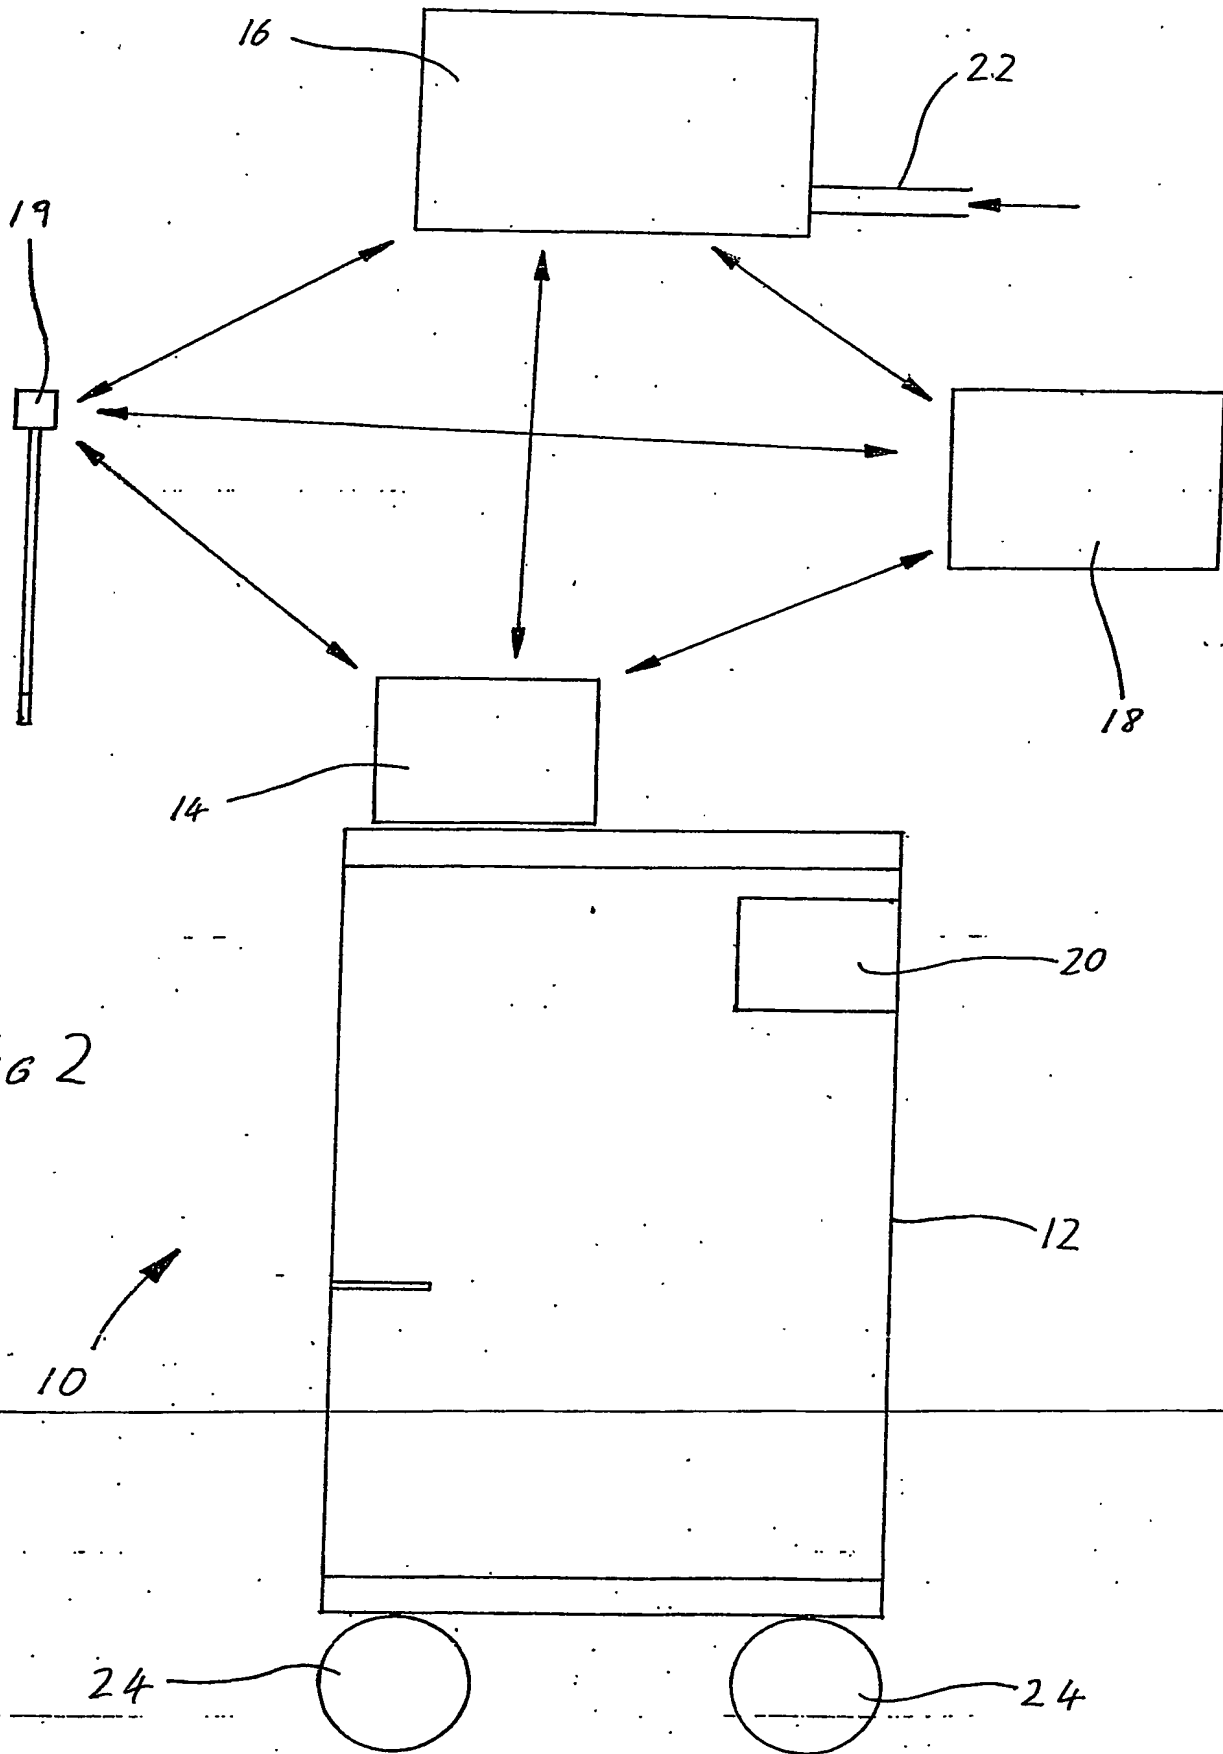


FIG 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**